


CB3 Baking Band

**Problem-Free Operation in Tortilla Ovens
from the Inventors of Baking Bands**

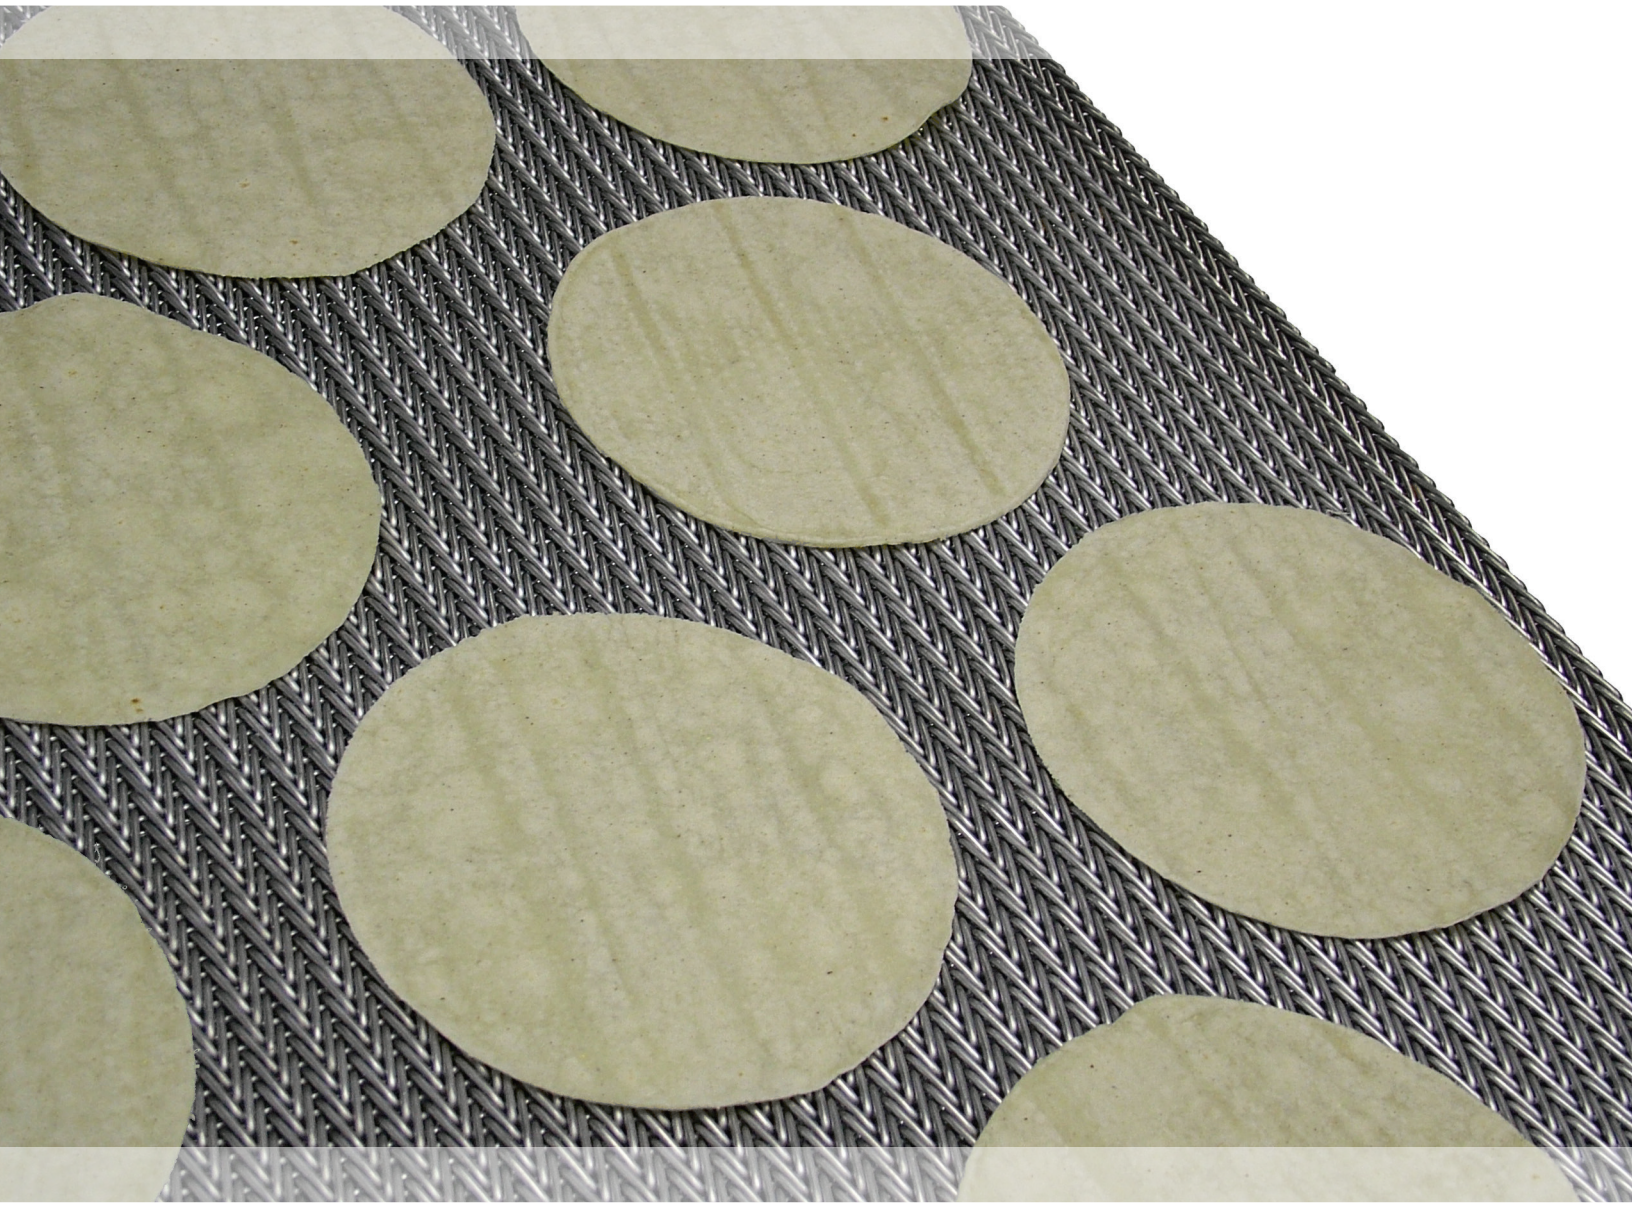

Downtime & Costs Minimized

The CB3 Baking Band is expressly engineered to traverse the 6" terminal rolls commonly found in tortilla ovens, while providing expertly baked tortillas. The increased flexibility of the CB3 stops the band's mesh from bending and breaking, as often occurs with less flexible bands.



Throughput & Profits Maximized!

CB3 – Special Tortilla Baking Band

Increase Your Production Efficiency with the Ashworth CB3 Baking Band

Features & Benefits

- Flexible mesh easily turns over small, 6" terminal rolls, reducing stress on the band and minimizing wire mesh failure due to metal fatigue
- Dense weave promotes even heating across the entire width of the band, ensuring even baking of tortillas
- Woven to the industry's tightest tolerances to minimize belt stretch, prevent edge sag and ensure a long operating life
- Precision-formed spirals ensure true tracking
- Every belt factory tested

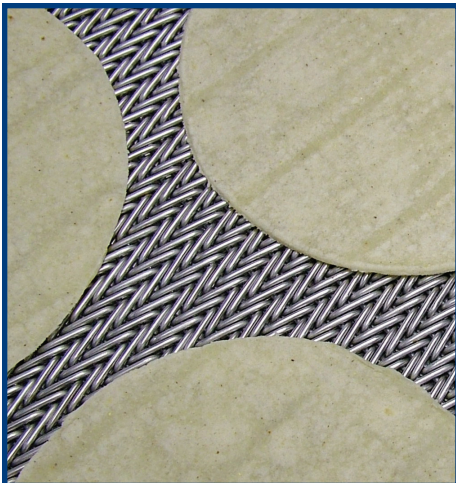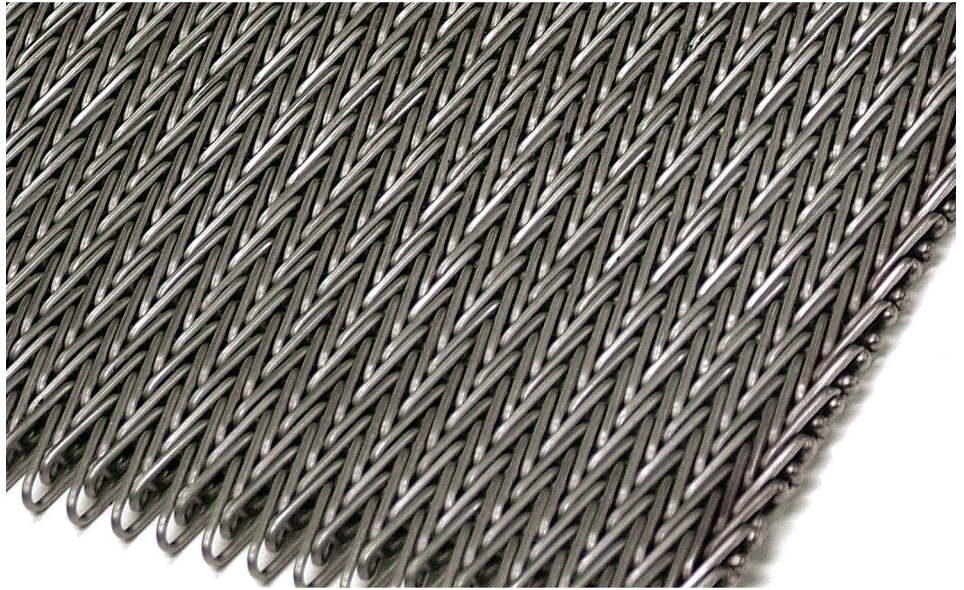

Technical Specifications*

Material	14 gauge [0.08" (2.0 mm)] high carbon or stainless steel wire
Turn Capability	Straight run only
Minimum Width	1.28" (32.5 mm)
Maximum Width	144" (3658 mm)
Belt Strength	3500 lbs/ft (5200 kg/m) of belt width, based on high carbon steel at 70°F (21°C)
Longitudinal Pitch	0.17" (4.2 mm)
Conveying Surface	Overall Belt Width – (0.375" of 1 lateral pitch + 3 spiral wire diameters)
Mesh Type	Compound balanced weave with 3 connectors per spiral
Open Area	Minimal
Edge Treatment	Welded
Method of Drive	Friction driven on flat faced terminal rolls
Minimum Terminal Roll Diameter	6.00" (152.4 mm)
Options	Flattened Wire (F) surface or Precision Ground Light Weight (PGLW) surface (belt's surface is ground down flat after the weaving process is completed)
Recommended Option	Ashworth Controls, either Model 1 or Model 2

* Technical Specifications are dependent upon individual applications and are subject to engineering review.



USA: 800-682-4594 or 540-662-3494

UK: +44-01-384-355000

Netherlands: +31-53-481-6500

www.ashworth.com